

TECHNICAL INFORMATION

ARMADURA SMD IP65 28W 60CM 5000K

Armadura em Policarbonato com placa LED PCB, proteção IP65, PF >0.9 e várias potências para diferentes alturas de instalação


Ref. 34167277



REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
LED Type	SMD	Dimensions (LxWxH)	600x100x70mm	Total Luminous Flux	2660lm
Base		Weight	0.75kg	Luminous Efficacy	95lm/W
Body Material	PC/PC	Volume	43cm ³	Beam Angle	120°
Fixings	NO CLIP			Colour Temperature	5000K
Housing Colour	Grey			Colour Rendering Index	80
Nominal Lifetime (EOL end of life)	40000h			Colour Consistency	<=6
Dimmable	NO				

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	28W	Energy Label	A+	ROSH	YES
Nominal Voltage	220-240V	Energy Consumption KWH/1000H	28kWh	ENEC	YES
Operating Frequency	50/60Hz	Type of Protection	IP65	CE	YES
Power Factor	0.96	Protection Class	Class I	Warranty	2 YEARS
Starting Time 100% ON	0.01S	Protection Class IK (shock resistance)	IK08		
ON/OFF Cycles	>15000				
Operating Temperature	-25° C to +40° C				

SIZE

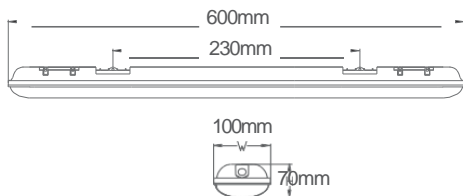

BEAM ANGLE

