

TECHNICAL INFORMATION

RÉGUA T5 IP20 4W 300MM

Régua de LED T5 com baixa altura de construção e possibilidade de criar linhas de luz contínuas com conexão simples.


Ref. 34167181 (4500K) | 34167182 (3000K)



REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Led Type		Dimensions (LxWxH)	300mm	Total Luminous Flux	340 350lm
Body Material	PVC	Weight		Luminous Efficacy	85lm/W
Fixings		Volume		Beam Angle	300°
Housing Colour	White	Model	Single	Colour Temperature	3000K 4500K
Nominal Lifetime (EOL end of life)	40.000H	PC/BOX	30	Colour Rendering Index	>80
Dimmable	NO			Colour Consistency	
Base					

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	4W	Energy Label	A+	CE	YES
Nominal Voltage	100-240V	Energy Consumption KWH/1000H	4kWh	ROSH	YES
Operating Frequency	50Hz	Type of Protection	IP20	ENEC	NO
Power Factor	0.9	Protection Class IK (shock resistance)		Warranty	2 YEARS
Starting Time 100% ON					
ON/OFF Cycles					
Operating Temperature					

SIZE

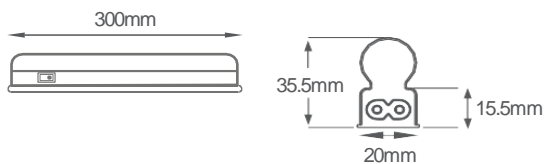

BEAM ANGLE



