

## TECHNICAL INFORMATIONS

### LED PAINEL ENCASTRAR 24W 4000K

Painel de Encastrar quadrado, ideal para tetos falsos com altura limitada.

Ref. 341670756



#### REFERENCE

Led Type	SMD
Mounting Type	Recessed
Body Material	Aluminium
Housing Colour	White
Body Shape	Square
Nominal Lifetime /EOL end of life)	25000hrs
Dimmable	NO

#### DIMENSION & WEIGHT

Lenght	300mm
Width	300mm
Height	20mm
Weight	0.835Kg
Cut-Out	280x280mm

#### PHOTOMETRICAL DATA

Total Luminous Flux	2130lm
Luminous Efficacy	90lm/W
Beam Angle	120°
Colour Temperature	4000K
Colour Rendering Index	>70
Colour Consistency	<=6
UGR	

#### ELECTRICAL AND OPERATING DATA

Nominal Wattage	24W
Nominal Voltage	85-265V
Operating Frequency	50/60Hz
Power Factor	>0.9
Operating Temperature	-20°C to +40°C


#### ENERGY LABEL & STANDARS

Energy Label	A+
Energy Consumption KWH/1000H	24kWh
Type of Protection	IP40
Protection Class	I
Protection Class IK (shock resistance)	

#### CERTIFICATIONS

2014/30/EU (EMC Directive)	YES
2014/35/EU (LVD Directive)	YES
ROHS	YES
ENEC	YES
Warranty	2 YEARS

#### SIZE

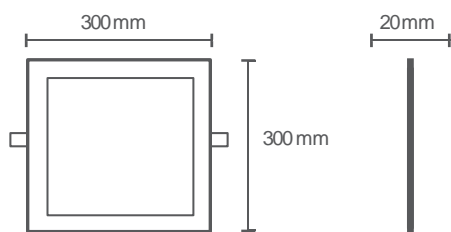

#### BEAM ANGLE

