

TECHNICAL INFORMATIONS

LED PAINEL ENCASTRAR 3W

Warm white

Neutral white

Cool white

Painel de Encastrar quadrado, ideal para tetos falsos com altura limitada.


Ref. 34167064 (3000K) | 34167065 (4000K) | 34167066 (6000K)



REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Led Type	SMD	Lenght	85mm	Total Luminous Flux	265 270 275lm
Mounting Type	Recessed	Width	85mm	Luminous Efficacy	90lm/W
Body Material	Aluminium	Height	20mm	Beam Angle	120°
Housing Colour	White	Weight	0.105Kg	Colour Temperature	3000K 4000K 6000K
Body Shape	Square	Cut-Out	65x65mm	Colour Rendering Index	>70
Nominal Lifetime /EOL end of life)	25000hrs			Colour Consistency	<=6
Dimmable	NO			UGR	

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	3W	Energy Label	A+	2014/30/EU (EMC Directive)	YES
Nominal Voltage	85-265V	Energy Consumption KWH/1000H	3kWh	2014/35/EU (LVD Directive)	YES
Operating Frequency	50/60Hz	Type of Protection	IP40	ROHS	YES
Power Factor	>0.9	Protection Class	I	ENEC	YES
Operating Temperature	-20°C to +40°C	Protection Class IK (shock resistance)		Warranty	2 YEARS

SIZE

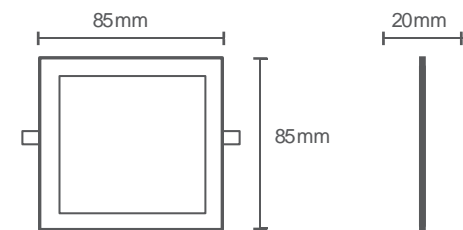

BEAM ANGLE

