




Front view

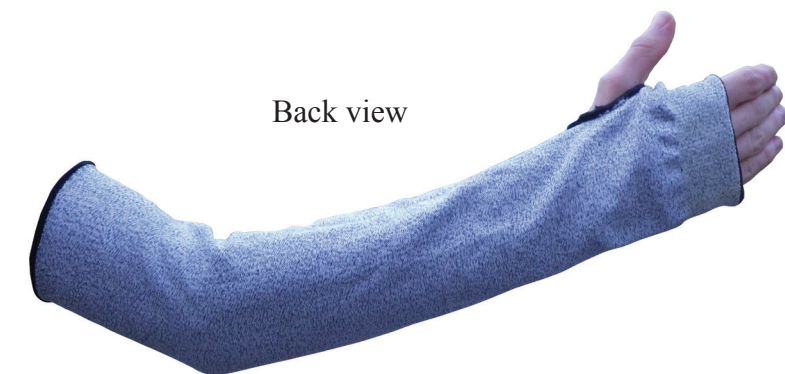

Back view

>>Use (*)

Thanks to its technical characteristics, this protective sleeve is particularly suitable for all major works requiring good protection of the forearm against mechanical risks (except perforation), including the cut (level C) and tear (level 4).

Industrial maintenance, automotive assembly, mechanical workshops, assembly, glass industry, cardboard factories, printers, etc

>> Technical features

✓ **Construction / materials** : seamless machine knitted protective sleeves from high density polyethylene yarn (HDPE) blended with polyamide, yarn fibreglass and spandex. Elastic at elbow and cuff. Thumb opening. Protection of the forearm, the wrist, the palm/back of the hand but not the fingers. Ambidextrous style.

✓ **Length** : 45 cm.

✓ **Color** : grey.

✓ **Gauge** : 13.

✓ **Packing** : - carton of 100 units.
- bundle of 10 units.

Learn more : www.singer.fr



>> Main advantages

- ✓ **Seamless construction**: improves user comfort (will avoid rough points and consequently the risks of reddening or irritation of the skin).
- ✓ **High-tech fiber**: HDPE fibers in particular, provide excellent protection against mechanical risks including cut (see results EN 388).
- ✓ **Thumb opening**, allows a good protection of the wrist, the hand (except fingers) while maintaining an excellent dexterity.
- ✓ **Ambidextrous**: this sleeve can be used either on left or right arm (hand).



>> Conformity

This glove has been tested according to the following European standards :

- **EN 420 : 2003 + A1 : 2009**. Protective gloves - General requirements and test methods.
- **EN 388 : 2016**. Protective gloves against mechanicals risks.

It complies with European **Regulation (EU) 2016/425** on Personal Protective Equipment (PPE). **Category II**.
EU type examination certificate (module B) issued by the **CTC**. Notified body n°0075.

Download the EU declaration of conformity on: <http://docs.singer.fr>



EN 388: 2016. Protective gloves against mechanical risks							
Mechanical data. Information about levels.	Level 1	Level 2	Level 3	Niveau 4	Level 5	Levels ▼	<div>EN 388 : 2016</div> <div>3 X 4 X C</div>
Abrasion resistance (number of cycles)	100	500	2000	8000	-	3	
Blade cut resistance (index)	1,2	2,5	5,0	10,0	20,0	X	
Tear resistance (in Newtons)	10	25	50	75	-	4	
Perforation resistance (in Newtons)	20	60	100	150	-	X	
Cut resistance (N) As per EN ISO13997) (TDM test)	Level A	Level B	Level C	Level D	Level E	Level F	Level
«X» means that the glove has not been submitted to the test.	2	5	10	15	22	30	C

Your **SINGER® SAFETY** partner

SINGER®
safety